


Accuracy $\pm 1\%$
 Modular apron width or length
 Long lasting reference in our range of products
 Constant technical evolution
 Available in 5 widths and 4 lengths as a standard
 Easy maintenance



Extraction and weighing:
 Clay
 Clinker
 Limestone,
 etc.

MAMMUTHUS

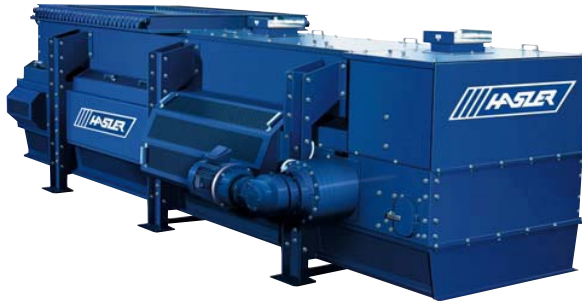

- Entirely closed
- Double (or triple) chain traction
- Embedded digital weigh system
- Speed control system of the feeding movement
- Inspection doors to ease maintenance



Limestone extraction



*Weighbridge
Digital load cell*


Function:

The MAMMUTHUS is a device used both as a strong apron feeder and as a common weigh belt feeder.
 The speed is controlled according to the material load in order to obtain a constant and accurate flowrate.

The load is measured by two digital load cells (integrated weighbridge) through the rails deflection.
 An index flow sensor (one per lap) synchronises the segmented detaring of the empty apron.
 A pulse generator integrated to the gear motor gives the speed of the conveyor.
 The MAMMUTHUS can extract difficult materials like clay, hot and abrasive products such as clinker and many other, in different industrial applications.

Options:

Spillage Conveyor:
 One or more cross scraper(s) driven by two side chains recover the particles that escaped from the weighfeeder and bring back to the common discharge.

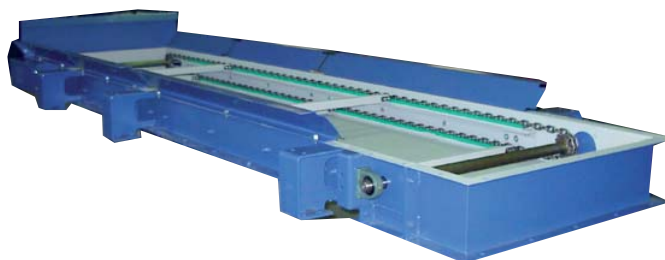

Other options:
 Rod closing gates
 Analogic load cells

Controller:

The SCM2 controller directly receives the signals and informations from the sensors: weight, speed and index.
 It can calculate the flowrate totalization and speed control signal. Informations and alarms are deported on the SDU display.

SCM2 Field or Panel Version:
 See SCM2-F.260.001-E or SCM2-P.260.001-E



SCM2-Panel




SDU



SCM2-Field

Dimensions and weights

MAMMUTHUS TYPE	C	F	A	B1	B2	B3	D	E	G	H	K	L	Weight (kg)
	C to C	Inlet	Inlet to Outlet										
800	3 000	1 000	2 450	2 210	-	-	1 730	670	2 220	4 480	1 440	680	5 000
	3 500	1 500	2 700	1 690	1 020	-							5 500
	4 000	2 000	2 950	1 690	1 520	-							6 000
1000	3 500	1 000	2 650	2 190	-	-	1 650	870	2 340	4 460	1 640	605	5 500
	4 000	2 000	3 150	1 670	1 520	-							6 000
	5 000	3 000	3 650	1 670	1 260	1 260							6 500
1200	3 500	1 000	2 820	2 190	-	-	1 790	1 070	2 540	4 460	1 840	605	6 000
	4 000	2 000	3 320	1 990	1 200	-							6 500
	5 000	3 000	3 820	1 990	1 100	1 100							7 000
1400	3 500	1 500	2 900	1 670	1 020	-	1 970	1 270	2 880	4 460	2 040	680	7 100
	4 000	2 000	3 150	1 670	1 520	-							7 800
	5 000	3 000	3 650	1 670	1 260	1 260							8 500
1600	3 500	1 500	2 900	1 670	1 020	-	1 970	1 470	3 080	4 460	2 240	680	8 300
	4 000	2 000	3 150	1 670	1 520	-							9 200
	5 000	3 000	3 650	1 670	1 260	1 260							10 100

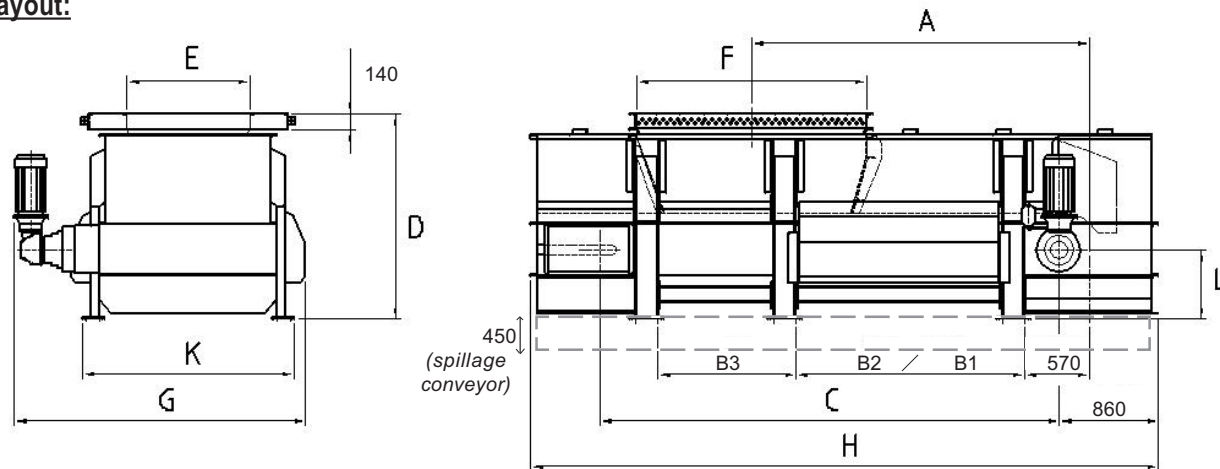Layout:

Technical data

Motor	AC
Protection class	IP55
Load cells	Digital
Weight maximum load	+ 1 000 kg
Installed power	from 1,5 kW to 30 kW
Gear unit	Planetary gear unit
Transmission	Direct on head drum
Working temperature range	-10°C to +60°C
Speed sensor	Digital encoder
Girders and cover	Steel
Apron conveyor	Steel
Corrosion protection	Primer and finish coat
Color and Coating	RAL 5000 blue as a standard, 80 µm

HASLER International SA
 Z.I. de L'Abbaye
 F-38780 Pont-Evêque France
 Tel. +33 (0)4 74 16 11 50
 Fax +33 (0)4 74 16 11 55
 E-mail: sales.fr@hasler-int.com

HASLER Deutschland GmbH
 Münsterstrasse 69
 D-49525 Lengerich Germany
 Tel. +49 (0)5481 805-0
 Fax +49 (0)5481 805-110
 E-mail: sales.de@hasler-int.com

HASLER Suisse Sàrl
 Rue du Puits-Godet 10a
 CH-2000 Neuchâtel Switzerland
 Tel. +41 (0)32 720 23 00
 Fax +41 (0)32 720 23 90
 E-mail: sales.ch@hasler-int.com

**HASLER Industrial Equip
 Shanghai Co. Ltd**
 541 Deli Road - Malu Town
 Jiading District
 CN - 201801 Shanghai P.R. China
 Tel. +86 21 5910 6058
 Fax +86 21 5910 5300
 E-mail: sales.cn@hasler-int.com